


Hercules.

This compact and highly-resilient solution is perfect for extreme-traffic areas. Hercules is a smooth-finish needlepunch product constructed with Stainproof Miracle Fibre (Polypropylene) which offers high appearance retention.

Product Information

The popular and practical colourways of Hercules allow for attractive finishes and superb design options in the most

demanding heavy-commercial environments. Available in both modular tiles and wall-to-wall carpeting.

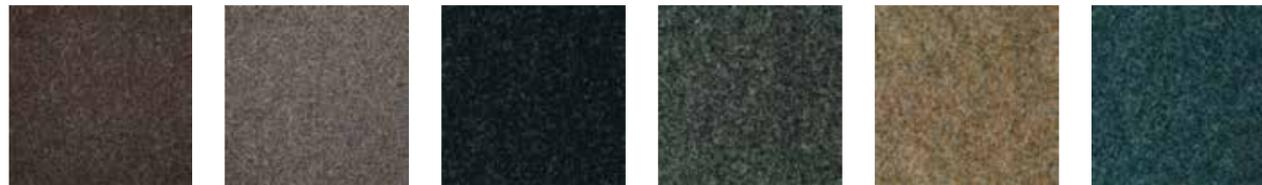

Athena

Beta

Blackout

Helio

Irish Linen

Parakeet



Pegasus



Plato



Rhapsody



Triton




Zeus

BILL OF QUANTITIES:

- Belgotex HERCULES 3.66m ResinBac Broadloom, HERCULES 50cm x 50cm ResinBac tiles are manufactured from Stainproof Miracle fibre (Polypropylene) & Stainproof Eco Fibre Blend (Polypropylene).
- This product is to be laid in accordance with SANS 10186 fitting code of practice.
- Belgotex HERCULES ResinBac tiles must be tessellated at installation.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.

** Weighted Average *** Also available in 60 x 60cm, 1m x 50cm, 1m x 1m NexBac tiles, 25cm x 100cm and 30cm x 120cm NexBac plank tiles. As these sizes and backings are not standard, minimum production quantities apply. Please contact your nearest Belgotex representative for more information.

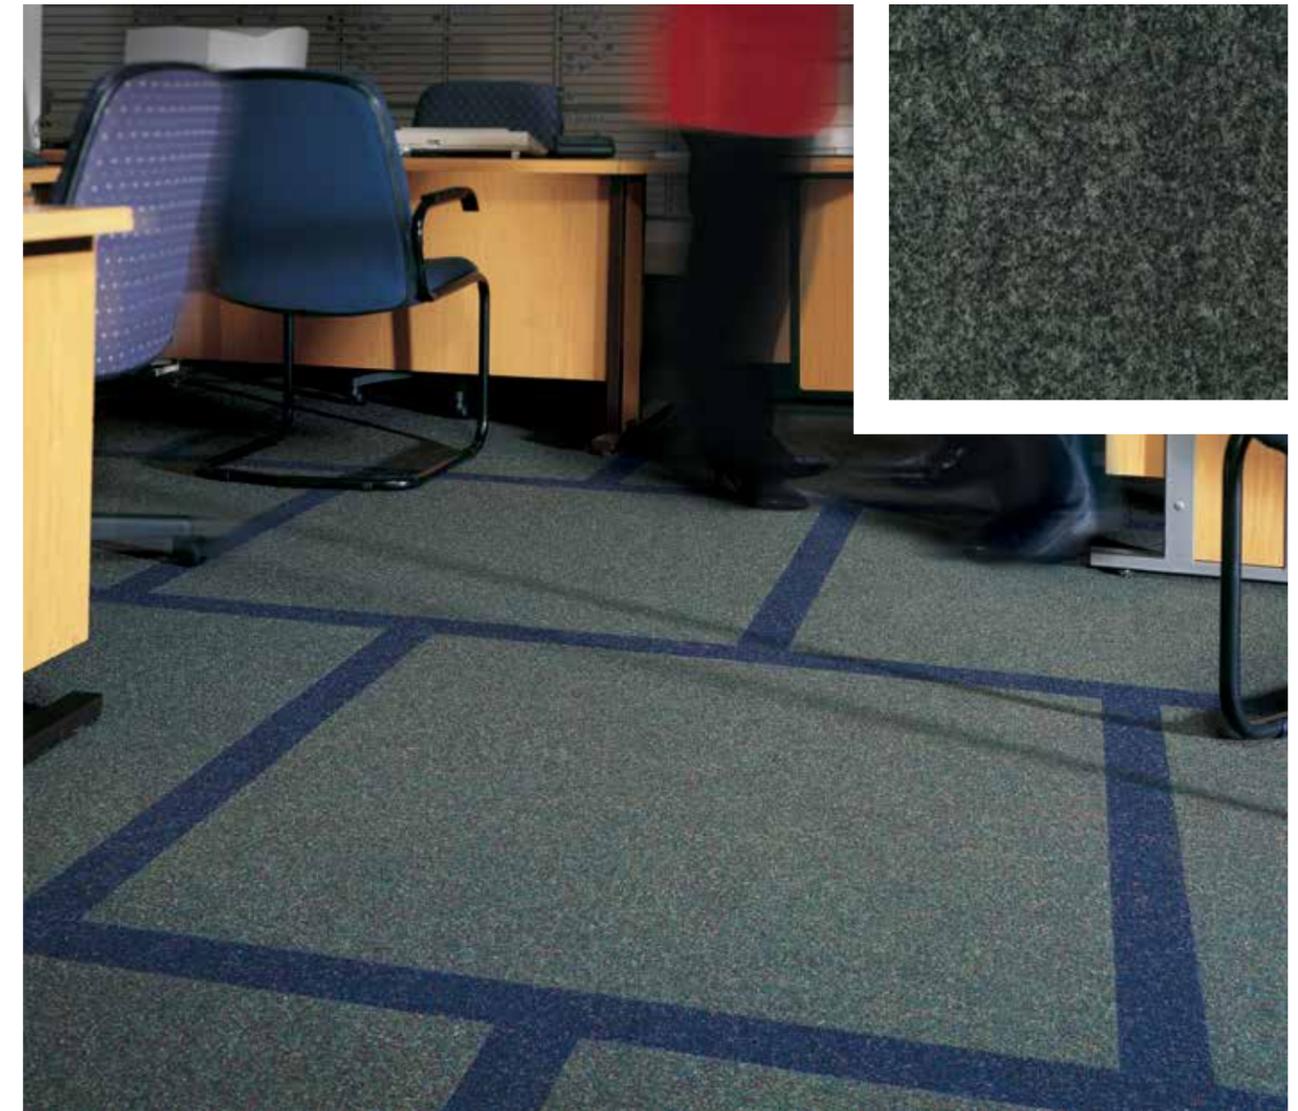

Hercules | Mixed

Extended Specifications

	ResinBac Broadloom	ResinBac Tiles
Construction	Needlepunch	Needlepunch
Product Description	Heavy Commercial, PP, Needle-punch, ResinBac Tile/Broadloom	Heavy Commercial, PP, Needle-punch, ResinBac Tile/Broadloom
Fibre Type	Stainproof Miracle Fibre (Polypropylene)	Stainproof Miracle Fibre (Polypropylene)
Fibre Mass	550g/m ²	550g/m ²
Recycled Content	Face Fibre (Certain colours only)	Face Fibre (Certain colours only)
Use Classification	Heavy Commercial	Heavy Commercial
Total Thickness	4mm (±0.5mm)	4mm (±0.5mm)
Total Mass	±712g/m ² **	±712g/m ² **
Standard Size Available	3.66m	50 x 50cm***
Fire Index	2 (SANS 10177-IV)	2 (SANS 10177-IV)
Colour fastness to:		
(i) Light	7 (ISO 105-B02)	7 (ISO 105-B02)
(ii) Rubbing	(a) Wet 4-5 (ISO 105-X12)	(a) Wet 4-5 (ISO 105-X12)
Rubbing	(b) Dry 4-5 (ISO 105-X12)	(b) Dry 4-5 (ISO 105-X12)
(iii) Water	4-5 (ISO 105-E01)	4-5 (ISO 105-E01)
Electrostatic Propensity	Less than 2.0kV (ISO 6356 & EN1307)	Less than 2.0kV (ISO 6356 & EN1307)
Static Control	Permanent	Permanent
VOC Tested	Passed	Passed