



The Forces Collection: Earth Rock.

Rock is the foundation of our earth. It moulds continents together and builds up mountains that are awe-inspiring in their magnificence. As rocks are broken apart by water, wind and natural elements, folds and fissures develop in their stony surface. And it is these unique and interesting cracks and crevices that are the inspiration behind Belgotex's Earth Rock range.

Product Information

This Tufted Colour Placement range is a Stainproof SDX (Solution Dyed Nylon) product, available with the dimensionally stable backing system, EcoBac, which offers sound absorption and sound reduction

properties, and is also environmentally friendly. Belgotex's Earth Rock range is a solid new foundation for any heavy commercial setting.



***Non-stocking Colours**
As these colours are non-stocking, minimum production quantities apply. Please contact your nearest Belgotex representative for more information.


- BILL OF QUANTITIES:**
- Belgotex EARTH ROCK 50cm x 50cm NexBac tiles are manufactured from Stainproof SDX and Stainproof Eco SDX Blend (Solution Dyed Nylon).
 - This product is to be laid in accordance with the SANS 10186 fitting code of practice.
 - Belgotex EARTH ROCK can be installed in the following directions: tessellated, random, monolithic, brick and ashlar.
 - Belgotex recommends the use of carpet protector mats where castor wheels are used.

The Forces Collection: Earth Rock | Plymouth Rock



Extended Specifications

Construction	Tufted Colour Placement
Product Description	Heavy Commercial SDN, Tufted Loop Pile, EcoBac (EOS) Tile
Yarn Type	Stainproof SDX & Stainproof Eco SDX (Solution Dyed Nylon)
Yarn Mass	810g/m2
Recycled Content	EcoBac/NexBac Eco (on request only) & Certain Colours Only
Use Classification	Heavy Commercial
Pile Height	2.5mm to 6mm (±0.5mm)
Total Thickness	9mm (±0.5mm)
Total Mass	±5575g/m2**
Standard Tile Size	50 x 50cm***
Machine Gauge	1/10"
Stitches/10cm	36
Fire Index	2 (SANS 10177-IV)
Colour fastness to:	
(i) Light	7 (ISO 105-B02)
(ii) Rubbing	(a) Wet 4-5 (ISO 105-X12)
Rubbing	(b) Dry 4-5 (ISO 105-X12)
(iii) Water	4-5 (ISO 105-E01)
Electrostatic Propensity	Less than 2.0kV (ISO 6356 & EN1307)
Static Control	Permanent
VOC Tested	Passed

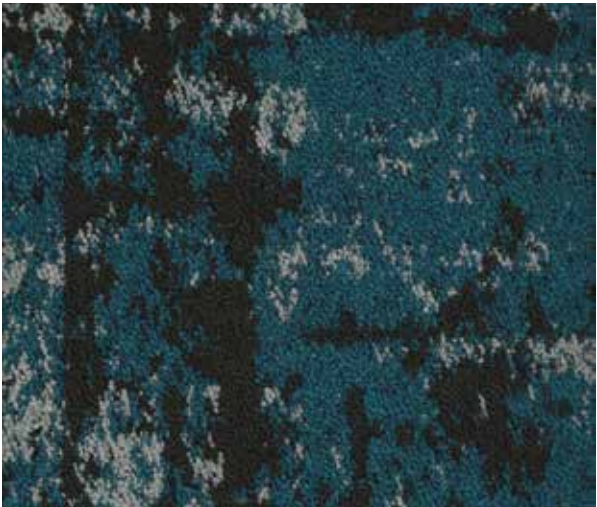

** Weighted Average *** Also available in 60 x 60cm, 1m x 50cm, 1m x 1m NexBac tiles, 25cm x 100cm and 30cm x 120cm NexBac plank tiles. EcoBac is standard for 50 x 50cm tiles in stock and available on request for 1m x 1m tiles. As these sizes and backings are not standard, minimum production quantities apply. Please contact your nearest Belgotex representative for more information.