











Hard Graft.

A commercial collection of two designs built for endurance in general/medium commercial traffic areas. Hard Graft™ by Belgotex offers a tile and plank in both designs to infuse resilient texture into the modern work environment. The four colourways cover a variety of moody hues that deliver an organic canvas to all things “Cubicool” – what’s that you ask? It’s today’s culture of creating inspiring workspaces that echo the attitude of the business.

Product Information

This commercial collection is available in two design – Graded is more structured and linear in appearance and Shaded is a dappled distressed pattern. The palette is mostly tonal across all 4 colourways giving way to standout décor & furniture pieces.

Graded		Shaded	
			
Chill	Deep	Chill	Deep
			
Edge	Hype	Edge	Hype




- BILL OF QUANTITIES:
- Belgotex HARD GRAFT 50cm x 50cm & 30cm x 120cm NexBac tiles are manufactured from Stainproof Miracle Fibre (Polypropylene).
 - This product is to be laid in accordance with the SANS 10186 fitting code of practice.
 - Belgotex HARD GRAFT can be installed in the following directions: 50cm x 50cm can be tessellated, ashlar, brick & random and 30cm x 120cm can be ashlar or herringbone.
 - Belgotex recommends the use of Carpet protector mats where castor wheels are used.

Hard Graft | Graded & Shaded | Hype



Extended Specifications

Construction	Tufted Multi Scroll Loop Pile
Product Description	Medium Commercial, PP, Tufted Loop Pile, Bitumen Tile
Yarn Type	Stainproof Miracle Fibre (Polypropylene)
Yarn Mass	560g/m2
Recycled Content	Backing (NexBac Eco/EcoBac (EOS) on request only)
Use Classification	General/Medium Commercial
Total Thickness	2.5mm to 5.5mm (±0.5mm)
Pile Height	±7mm
Total Mass	±4100g/m2
Standard Size	50cm x 50cm and 30cm x 120cm
Machine Gauge	1/10"
Stitches	39
Fire Index	2 (SANS 10177-IV)
Colour Fastness To:	
i) Light	7(ISO 105-B02)
ii) Rubbing	(a) Wet 4-5 (ISO 105-X12)
Rubbing	(b) Dry 4-5 (ISO 105-X12)
iii) Water	4-5 (ISO 105-E01)
Electrostatic Propensity	Less than 2.0kV (EN 1307)
Static Control	Permanent
VOC Tested	Pass

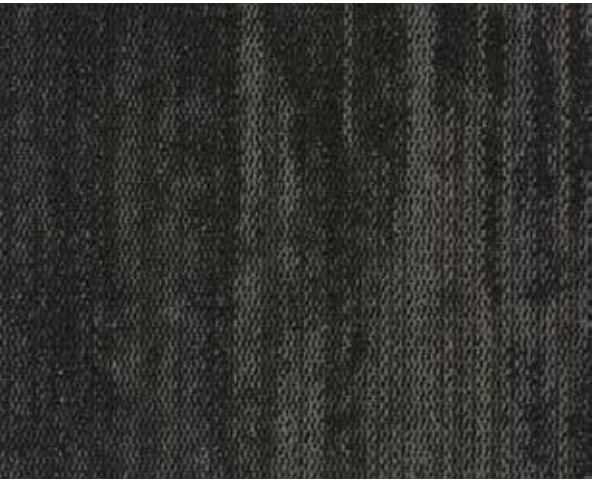

** Weighted average
*** Also available in 60cm x 60cm, 1m x 50cm, 1m x 1m NexBac tiles and 25cm x 100cm NexBac plank tiles. EcoBac is available on request for 50cm x 50cm and 1m x 1m tiles. As these sizes and backings are not standard, minimum production quantities apply.