




Terrazzi.

Derived from 18th century Venetian pavements where marble, quartz, granite or glass was bonded in cement and then polished, technological advances in vinyl flooring has made it possible for this collection of four ultra-realistic colours to exploit the depth, nuance and unique beauty of traditional Terrazzo.

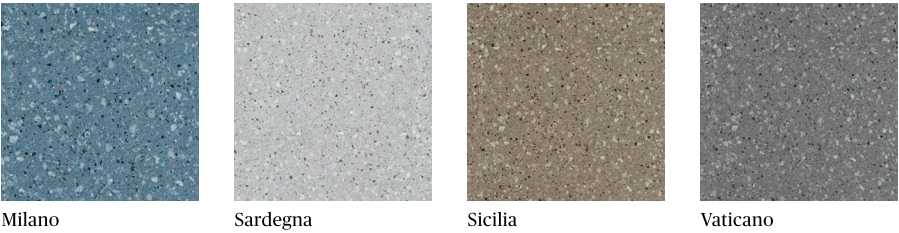

Extended Specifications

Type of Installation	Tile Installation
Application	Heavy Commercial
Wear Layer Thickness	0.55mm
Overall Thickness	2.5mm
Tile Size	500mm x 500mm
Quantity Per Box	4.0m ²
Number of Tiles	16 tiles per box
Chemical Resistance	YES (EN 26987)
Fire Index	Bfl-s1 (EN13501)
Slip Resistance	DS-R9 (DIN 51130)
Residual Indentation	< 0.1mm (EN 24343)
Thermal Conductivity	0.091 W/m*K (EN 12664)
Electrostatic Behaviour	0.1 kV (EN 1815)
Dimensional Stability	≤0.25% (EN 23999)
Colour Fastness	m > 6 Grade (ISO 105-B02)
Sound Absorption	Approx. 3dB (EN 10140)
Castor Chair	Yes, Type W (EN 4918) (Use soft non-staining wheels)

