


The Forces Collection: Torrential Rain.

Thunderstorms are nature’s own symphony. The sound of thunder rumbles across jagged landscapes and torrential rain pelts down in an even rhythm, cutting and chiseling architectural shapes out of stone and rock.

Product Information

Rain is one of nature’s greatest and most inspiring forces, and the sight of heavy raindrops splattering across a windowpane, running down the glass in watery rivulets, is mesmerizing. The patterns that they make, and the trails they leave behind are the inspiration that runs through our Belgotex

new Torrential Rain range of heavy commercial carpet tiles. Torrential Rain’s repetitive patterns in the high-low pile gives a textured look and creates a beautiful rain-inspired setting in any heavy commercial environment.

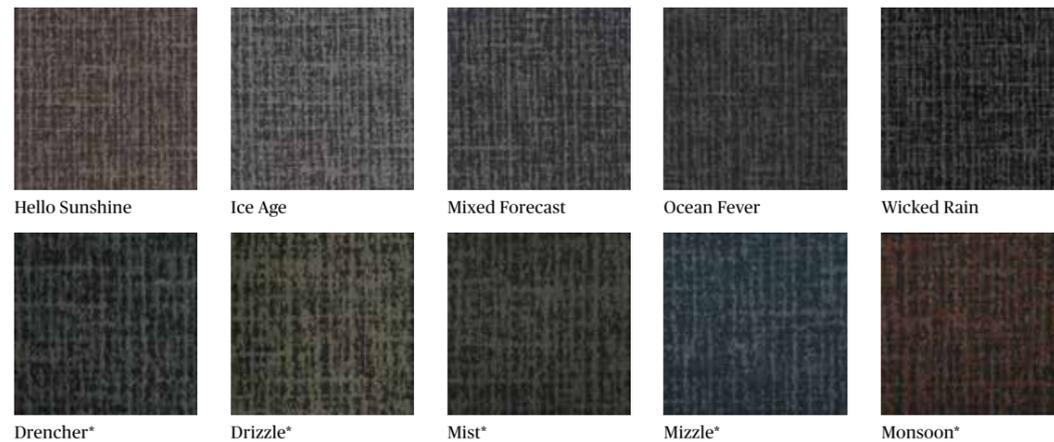


***Non-stocking Colours**
As these colours are non-stocking, minimum production quantities apply. Please contact your nearest Belgotex representative for more information.

BILL OF QUANTITIES:

- Belgotex TORRENTIAL RAIN 50cm x 50cm NexBac tiles are manufactured from Stainproof SDX and Stainproof Eco SDX Blend (Solution Dyed Nylon).
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex TORRENTIAL RAIN can be installed in the following directions: tessellated, random, monolithic, brick and ashlar.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.

The Forces Collection: Torrential Rain | Drencher

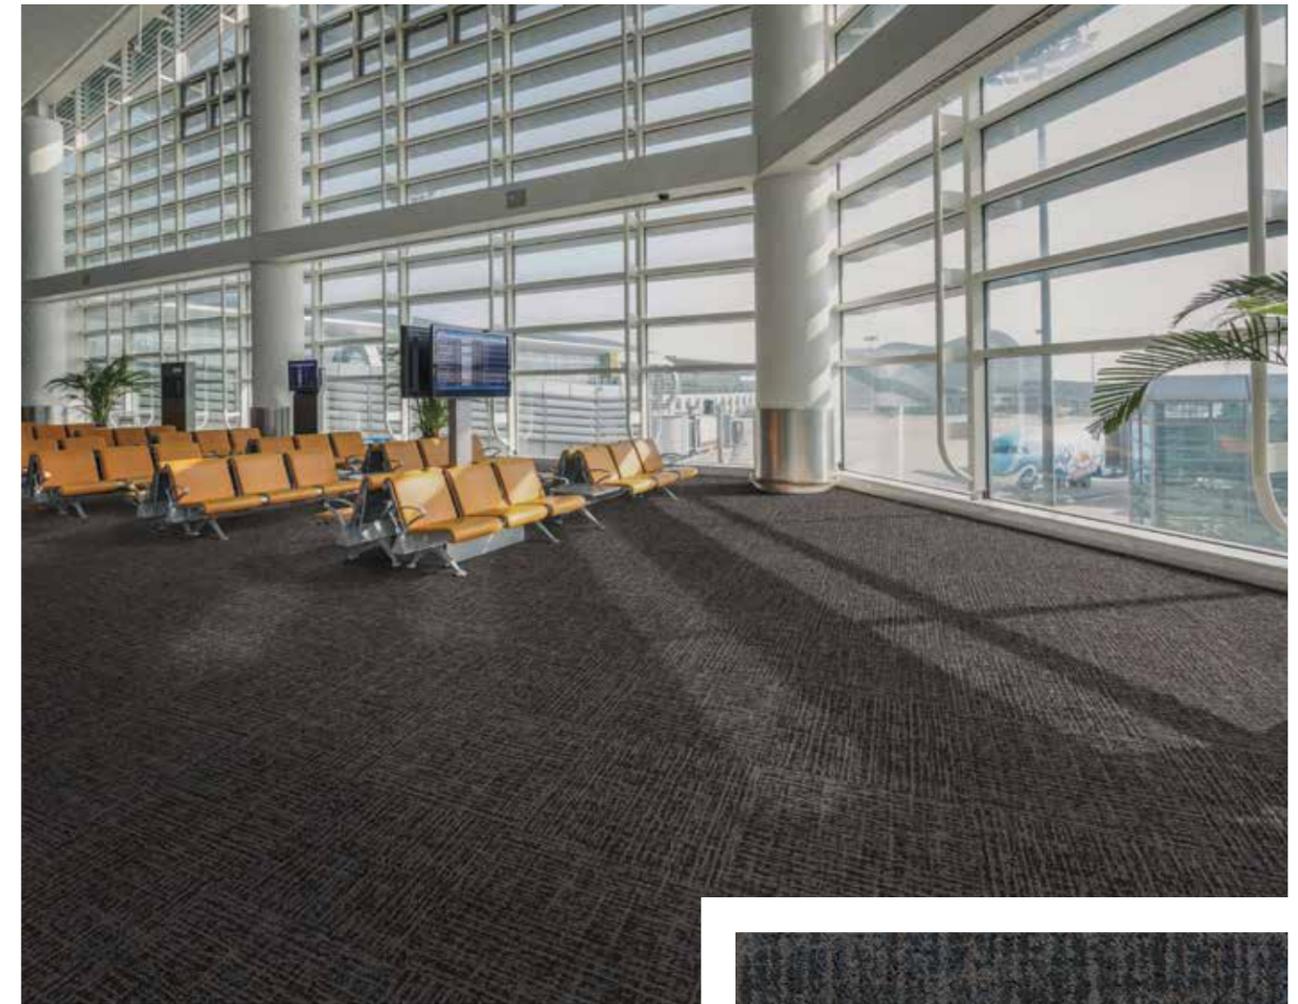

Extended Specifications

Construction	Tufted Colour Placement
Product Description	Heavy Commercial SDN, Tufted Loop Pile, EcoBac (EOS) Tile
Yarn Type	Stainproof SDX & Stainproof Eco SDX (Solution Dyed Nylon)
Yarn Mass	810g/m2
Recycled Content	EcoBac/NexBac Eco (on request only) & Certain Colours Only
Use Classification	Heavy Commercial
Pile Height	2.5mm to 5.5mm (±0.5mm)
Total Thickness	9mm (±0.5mm)
Total Mass	±5575g/m2**
Standard Tile Size	50 x 50cm***
Machine Gauge	1/10"
Stitches/10cm	36
Fire Index	2 (SANS 10177-IV)
Colour fastness to:	
(i) Light	7 (ISO 105-B02)
(ii) Rubbing	(a) Wet 4-5 (ISO 105-X12)
Rubbing	(b) Dry 4-5 (ISO 105-X12)
(iii) Water	4-5 (ISO 105-E01)
Electrostatic Propensity	Less than 2.0kV (ISO 6356 & EN 1307)
Static Control	Permanent
VOC Tested	Passed

** Weighted Average *** Also available in 60 x 60cm, 1m x 50cm, 1m x 1m NexBac tiles, 25cm x 100cm and 30cm x 120cm NexBac plank tiles. EcoBac is standard for 50 x 50cm tiles in stock and available on request for 1m x 1m tiles. As these sizes and backings are not standard, minimum production quantities apply. Please contact your nearest Belgotex representative for more information.