



Versatile.

Versatile is a semi-flexible vinyl tile supplied in a 2.0mm and 2.5mm thickness and 300mm x 300mm in size, with a PU layer and manufactured to specifications EN654.

Product Information

The material is suitable for heavy commercial applications and must be fully bonded and installed as per the SANS 10070 code of practice for the installation of

resilient thermoplastic and similar flexible floor covering materials, in conjunction with the Belgotex installation recommendations.



603 Bright White



610 White



612 Stormy Grey



615 Pewter



628 Signal Red



642 Cream



657 Rosemary



676 Ocean Blue



619 Black



682 Sandal




686 Camel



688 Brown

Versatile | Mixed

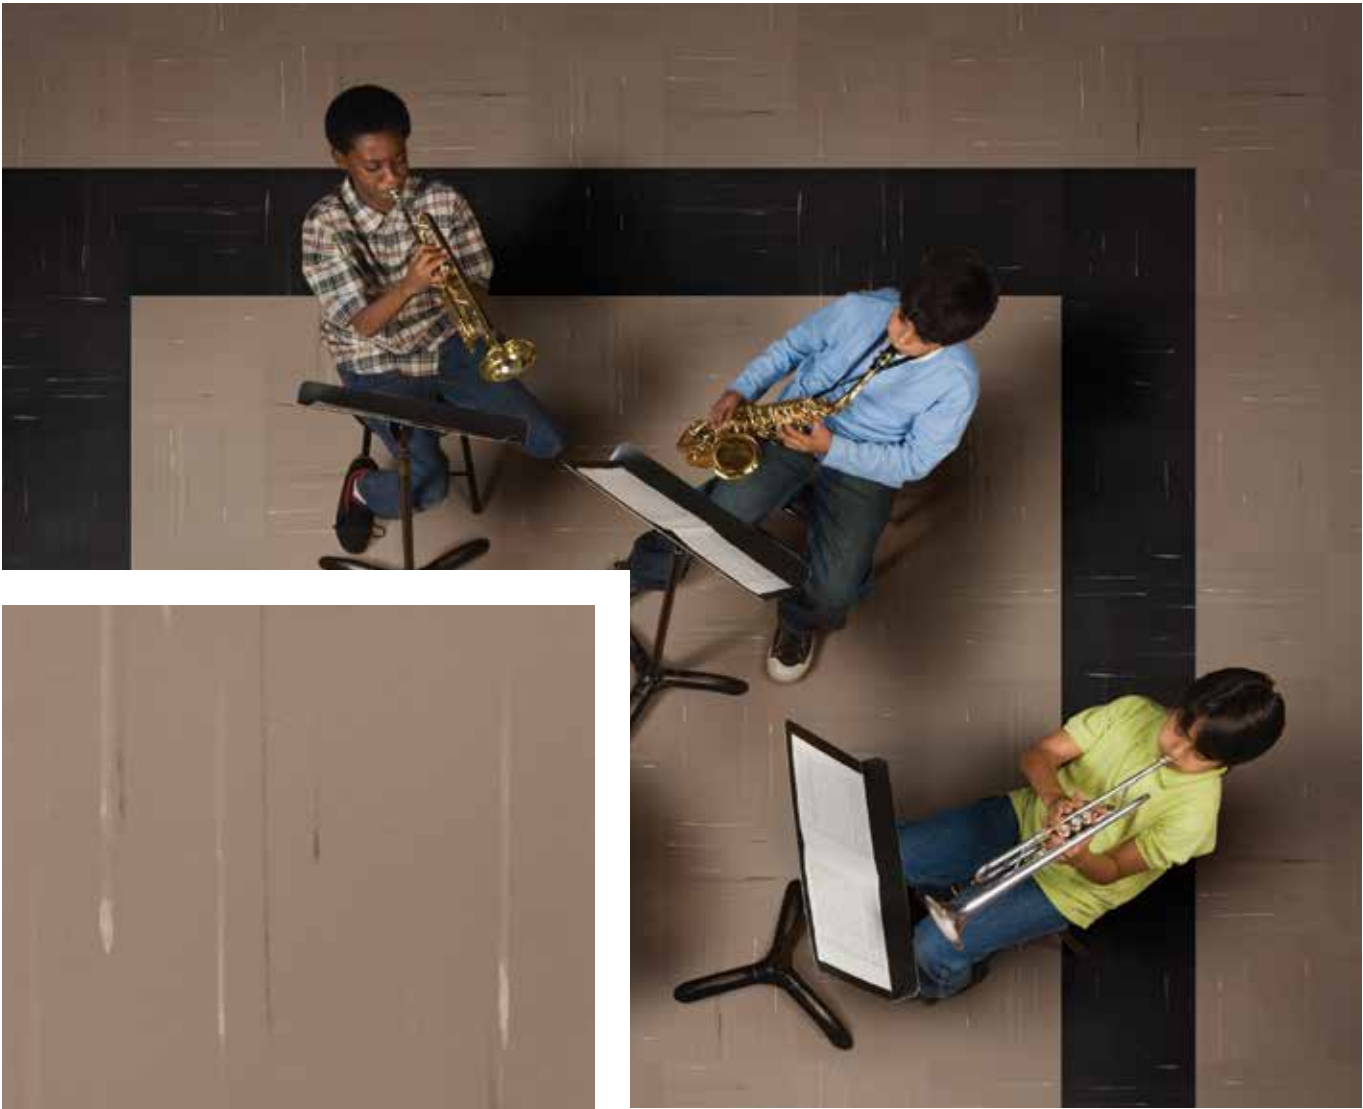

Extended Specifications

Total Thickness	2mm	2.5mm	
Use Classification	34-43 (EN 685) Heavy Commercial	34-43 (EN 685)	Heavy Commercial
Weight	3800g/m2	4700g/m2	
Tile Size	300 x 300mm	300 x 300mm	
Approximate Area Coverage/Box	6.3m2	5.04m2	
Wear Group	F (EN 654)	F (EN 654)	
Abrasion Resistance	≤ 15mm3 (EN 660.2)	≤ 15mm3 (EN 660.2)	
Static Electrical Propensity	< 2kV (EN 1815)	< 2kV (EN 1815)	
Fire Rating	Bfl-s1 (EN 13501-1) 2 (SANS 10177-4)	Bfl-s1 (EN 13501-1) 2 (SANS 10177-4)	
Slip Resistance	R9 (DIN 51130)	R9 (DIN 51130)	
Dimensional Stability	≤ 0.25% (EN 434)	≤ 0.25% (EN 434)	
Residual Indentation	≈ 0.03mm (EN 433) 0.05mm (SANS786:2007)	≈ 0.03mm (EN 433)	0.05mm (SANS786:2007)
Thermal Conductivity	0.25W/(m.K) (EN 12524)	0.25W/(m.K) (EN 12524)	
Colour fastness	≥6° (EN 20105 - B02)	≥6° (EN 20105 - B02)	
Chemical Resistance	Yes (EN 423)	Yes (EN 423)	
Antibacterial & Fungicidal Treatment	Yes (EN ISO 846)	Yes (EN ISO 846)	
Surface Treatment	PU	PU	